


POLYKEN® 2328F

Non-Woven Single-Coated Tape

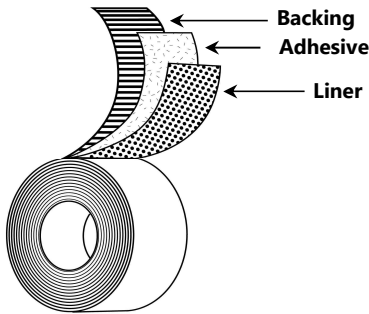

- Backing:** 2.4 oz/sy white spunlace polyester non-woven
- Adhesive:** Non-sensitizing medical-grade acrylic (M109)
- Liner:** 96lb white polycoated kraft, silicone treated on one side

Applications

- Electrodes: ECG, EKG, TENS
- Wound coverings
- Medical device attachment
- Island dressings

Features

- PET non-woven carrier
- Medical-grade Acrylic Adhesive
- 96lb Release Liner

Benefits

- Breathable for maximum patient comfort
- Highly conformable
- Excellent adhesion to skin and drape materials
- Stable to EtO and gamma sterilization
- Easy to die-cut and convert
- Good dimensional stability and lay flat

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/liner	22.6 mils	0.574 mm	PSTC 133
Adhesive Thickness	1.8 mils	0.046 mm	PSTC 133
Carrier Thickness	14.0 mils	0.356 mm	PSTC 133
Liner Thickness	6.8 mils	0.173 mm	PSTC 133
Adhesion to Steel	130 oz/in	14.22 N/cm	PSTC 101 Mod

The base adhesives in this medical product have been tested in accordance with ISO 10993 and found to be non-cytotoxic, non-irritating, and non-sensitizing.

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.

