


7511-80 Acrylic Transfer Tape

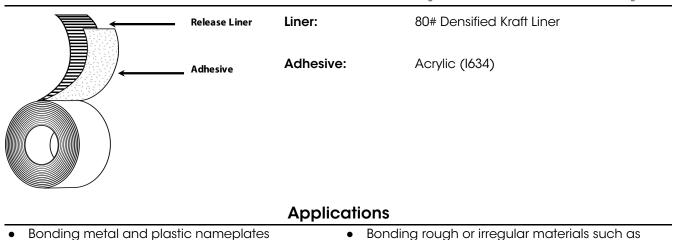

- Joining dissimilar materials where long aging and UV resistance are needed
- Bonding rough or irregular materials such as foam, fabrics, embossed metals, and plastics
- Laminating to enamel, metal, glass, or wood

Features	Benefits
Acrylic Adhesive	High ultimate adhesion
	 Excellent shear and cohesive strength
	Resists UV and rough environmental conditions
	Repositionable
• 80# Kraft Liner	 Conformable and good dimensional stability

Typical Test Values				
	Standard UOM	Metric UOM	Test Method	
Adhesive Thickness	5.0 mils	0.127 mm	PSTC 133	
Liner Thickness	4.0 mils	0.102 mm	PSTC 133	
Adhesion to Steel	75 oz/in	8.21 N/cm	PSTC 101 Mod - 1 mil PET	
Adhesion to Steel	175 oz/in	19.15 N/cm	PSTC 101 Mod - 2 mil Alu Foil	
Shear Strength (at 72 °F)	7 Days		PSTC 107 Mod	
Laminating Temperature	68 to 100 °F	20 to 38 °C		
Service Temperature	-30 to 220 °F	-34 to 104 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.

