


1368R

Transfer Adhesive

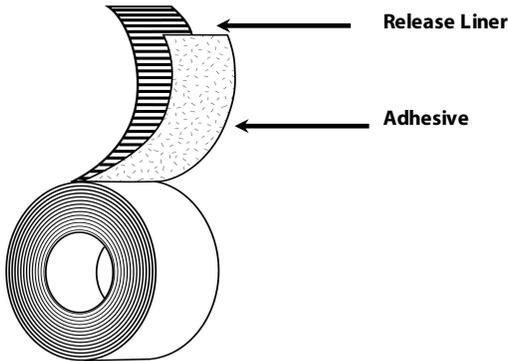

Adhesive: Acrylic (I602)

Liner: 60lb white kraft liner, silicone release treated on both sides with differential release

Applications

- Device mounting and bonding
- Component assembly and bonding
- Laminating paper, felt, sponge rubber, foam, and plastic

Features

- Acrylic Adhesive
- 60lb Release Liner

Benefits

- Adheres well to most foams, fabrics, and plastics
- Good peel, tack and shear performance
- Good high temperature performance
- Easy liner removal

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/liner	4.5 mils	0.114 mm	PSTC 133
Adhesive Thickness	1.0 mils	0.025 mm	PSTC 133
Liner Thickness	3.5 mils	0.089 mm	PSTC 133
Adhesion to Steel	45 oz/in	4.92 N/cm	PSTC 101 Mod
Shear Strength	>24 hours		PSTC 107
Application Temperature	50 to 150 °F	10 to 65 °C	
Laminating Temperature	65 to 150 °F	18 to 65 °C	
Maximum Continuous Use	180 °F	82 °C	
Intermittent Use	200 °F	93 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.