


## Acrylic Transfer Tape

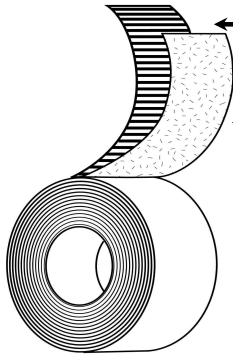

Release Liner

Liner:

74# Polycoated Kraft

Adhesive

Adhesive:

Acrylic (I629)

### Applications

- Laminating and bonding to ether and ester foams and low-perm urethane foams
- Applications requiring resistance to microbial growth

### Features

### Benefits

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>Acrylic Adhesive</li> <li>74# Polycoated Kraft Liner</li> </ul> | <ul style="list-style-type: none"> <li>High peel adhesion</li> <li>High shear strength</li> <li>Biostatic additive resists microbial growth</li> <li>Excellent adhesion to a broad spectrum of foams</li> <li>Conformable and good dimensional stability</li> </ul> |
|--|---|

### Typical Test Values

|                                  | Standard UOM  | Metric UOM    | Test Method                   |
|----------------------------------|---------------|---------------|-------------------------------|
| <b>Adhesive Thickness</b>        | 2.0 mils      | 0.051 mm      | PSTC 133                      |
| <b>Liner Thickness</b>           | 5.5 mils      | 0.140 mm      | PSTC 133                      |
| <b>Adhesion to Steel</b>         | 50 oz/in      | 5.47 N/cm     | PSTC 101 Mod - 1 mil PET      |
| <b>Adhesion to Steel</b>         | 150 oz/in     | 16.41 N/cm    | PSTC 101 Mod - 2 mil Alu Foil |
| <b>Shear Strength (at 72 °F)</b> | 7 Days        |               | PSTC 107 Mod                  |
| <b>Laminating Temperature</b>    | 68 to 100 °F  | 20 to 38 °C   |                               |
| <b>Service Temperature</b>       | -30 to 220 °F | -34 to 104 °C |                               |

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.