


## Silicone Transfer Tape

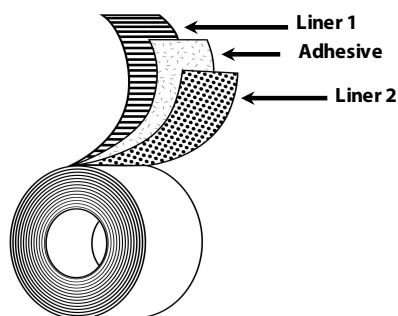

**Dual Liner:** 2 mil PET Film Liner

**Adhesive:** High-Temperature Silicone (S626)

### Applications

- Laminating and bonding to low-surface energy materials and silicone foams
- Ideal for use in high temperature and harsh environments

### Features

- Silicone Adhesive
- PET Film Liner

### Benefits

- High peel strength adhesive
- Exceptional high temperature performance
- Good bond to LSE substrates
- Conformable and good dimensional stability

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Liner Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Adhesion to Steel</b>	43 oz/in	4.70 N/cm	PSTC 101 Mod - 1 mil PET
<b>Adhesion to Polypropylene</b>	38 oz/in	4.16 N/cm	PSTC 101 Mod - 2 mil Alu Foil
<b>Shear Strength (at 72 °F)</b>	>7 Days		PSTC 107 Mod
<b>Loop Tack</b>	22 oz/in	2.41 N/cm	PSTC 16
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	-100 to 500 °F	-73 to 260 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.