


## Differential Double-Coated Tape

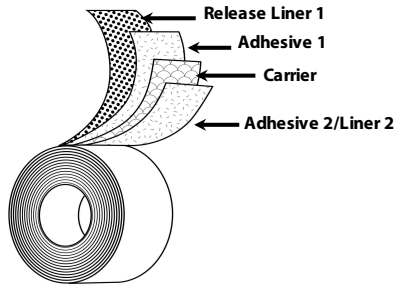

<b>Liner 1:</b>	Kraft Paper
<b>Adhesive 1:</b>	Medical-Grade Acrylic (I651)
<b>Backing/Carrier:</b>	1.0 mil PET Film
<b>Adhesive 2</b>	High-Temperature Silicone (S626)
<b>Liner 2:</b>	2 mil PET Film

### Applications

- Silicone foam gaskets
- Bonding dissimilar substrates
- Applications requiring UV, chemical, and high temperature resistance

### Features

- Acrylic Adhesive
- Polyester Film Carrier
- Silicone Adhesive
- Dual Liner

### Benefits

- High peel and high tack
- Bonds to a variety of substrates
- Die-cuts cleanly
- Support for aid in processing and application
- Conformable
- High peel strength adhesive
- Exceptional high temperature performance
- Good bond to LSE substrates
- Good lay-flat; moisture resistant

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Overall Thickness (w/liner)</b>	7.0 mils	0.178 mm	PSTC 133
<b>Air-Side Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Carrier Thickness</b>	1.0 mils	0.025 mm	PSTC 133
<b>Liner Side Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Liner Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Adhesion to Steel (Air Side)</b>	70 oz/in	7.66 N/cm	PSTC 101 Mod - 1 mil PET
<b>Adhesion to Steel (Liner Side)</b>	60 oz/in	6.56 N/cm	PSTC 101 Mod - 1 mil PET
<b>Adhesion to PP (Air Side)</b>	55 oz/in	6.02 N/cm	PSTC 101 Mod - 2 mil Alu Foil
<b>Adhesion to PP (Liner Side)</b>	60 oz/in	6.56 N/cm	PSTC 101 Mod - 2 mil Alu Foil
<b>Shear Strength</b>	7+ Days		PSTC 107 Mod
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	-100 to 500 °F	-73 to 260 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.