


Rubber Transfer Tape

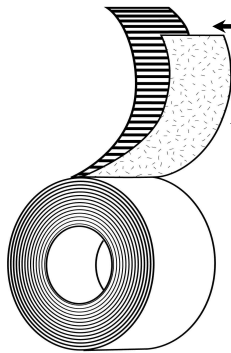

Release Liner

Liner:

12pt Polycoated Kraft

Adhesive

Adhesive:

Rubber (I918)

Applications

- General purpose bonding to foams and other low-surface energy materials

Features

- Rubber Adhesive
- 12pt Polycoated Kraft Liner

Benefits

- High peel strength
- Excellent initial tack
- Good shear strength
- Rigid liner facilitates processing and application

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Adhesive Thickness	3.0 mils	0.076 mm	PSTC 133
Liner Thickness	11.3 mils	0.287 mm	PSTC 133
Adhesion to Steel	145 oz/in	15.86 N/cm	PSTC 101 Mod - 1 mil PET
Adhesion to Steel	290 oz/in	31.73 N/cm	PSTC 101 Mod - 2 mil Alu Foil
Shear Strength (at 72 °F)	7 Days		PSTC 107 Mod
SAFT (1" x 1" x 1000 grams)	173 °F	78 °C	ASTM D 4498-00 Modified
SAFT (1" x 1" x 500 grams)	191 °F	88 °C	ASTM D 4498-00 Modified
Laminating Temperature	68 to 100 °F	20 to 38 °C	
Service Temperature	30 to 150 °F	-1 to 66 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.